

ProSeries™ HB Side / HB Top

PERFORMANCE AND RELIABILITY

- Blown polyethylene filter for **excellent resistance to high pressures (3.5 bar)**
- Tank manufactured according to the **NSF standard**
- **High resistance to treatment products**
- **Weather resistant**, can be installed outdoors
- **Easy maintenance of the filtering medium** without removing the valve
- **Swivel-mounted laterals** for ease of maintenance
- **40 to 50 micron filtration**



ProSeries™ HB Side

ProSeries™ HB Top




Vari-Flo™ 6-position valve



Sand easily accessible by removing the collar



Drain with plug that also serves as a dismantling tool

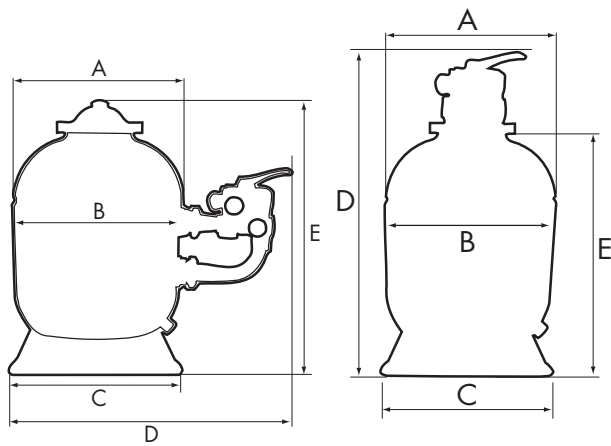

Technical Specifications

| | |
|----------------------------------|--|
| Max. water temperature | 40°C |
| Operating pressure | 0.5 - 1.3 bar |
| Maximum pressure | 3.5 bar |
| Connection | 1.5" (ø 401 mm - ø 612 mm) 2" (ø 762 mm - ø 895 mm) |
| Tank | Blown polyethylene, suitable for saltwater |
| Granulometry of filtration media | 0.4 ÷ 0.8 mm |

| | Flow rate* | Diameter ø | In/Out | Filtration area | Weight empty | Sand | Dimensions | | | | | Item |
|-----------------------|------------|------------|--------|-----------------|--------------|--------|------------|--------|--------|---------|---------|----------|
| | | | | | | | A | B | C | D | E | |
| PROSERIES™ HB SIDE | 10 m³/h | 510 mm | 1" ½ | 0.20 m² | 17 kg | 100 kg | 510 mm | 498 mm | 521 mm | 825 mm | 810 mm | S210SXE |
| | 14 m³/h | 612 mm | 1" ½ | 0.28 m² | 24 kg | 150 kg | 612 mm | 594 mm | 521 mm | 875 mm | 920 mm | S244SXE |
| | 22 m³/h | 762 mm | 2" | 0.45 m² | 35 kg | 250 kg | 762 mm | 725 mm | 585 mm | 1070 mm | 1008 mm | S0310SXE |
| | 30 m³/h | 895 mm | 2" | 0.64 m² | 61 kg | 350 kg | 895 mm | 880 mm | 585 mm | 1230 mm | 1147 mm | S0360SXE |
| PROSERIES™ HB TOP | 6 m³/h | 401 mm | 1" ½ | 0.12 m² | 12 kg | 50 kg | 401 mm | 391 mm | 371 mm | 858 mm | 598 mm | S166TXE |
| | 10 m³/h | 511 mm | 1" ½ | 0.20 m² | 17 kg | 100 kg | 511 mm | 500 mm | 521 mm | 989 mm | 729 mm | S210TXE |
| | 14 m³/h | 612 mm | 1" ½ | 0.28 m² | 24 kg | 150 kg | 612 mm | 594 mm | 521 mm | 1097 mm | 837 mm | S244TXE |
| | 22 m³/h | 762 mm | 2" | 0.45 m² | 31 kg | 250 kg | 762 mm | 725 mm | 585 mm | 1240 mm | 934 mm | S0310TXE |
| | 30 m³/h | 895 mm | 2" | 0.64 m² | 61 kg | 350 kg | 895 mm | 880 mm | 585 mm | 1374 mm | 1068 mm | S0360TXE |

* Provide sufficient height to open the filter (minimum clearance height: 650 mm above the filter).