

Triton® Sand Filter




FEATURES

- Easy-to-use water drain for simplified service and winterising
- All internal parts are threaded for ease of maintenance
- Swing-away diffuser allows instant access to sand and all internal parts
- Maximum operating temperature 50°C
- Maximum working pressure 3.5 bar
- 10-year limited warranty (shell only)

Triton high rate sand filters feature a special internal design that keeps the sand bed level, ensuring even water flow and resulting in the most efficient filtration possible.

The tank is made in one piece from fibreglass reinforced material to give years of dependable, corrosion resistant service. Triton has an easy access, heavy-duty lid with built in pressure relief valve for quick and easy maintenance and inspection and a side mounted six position multi-port valve.

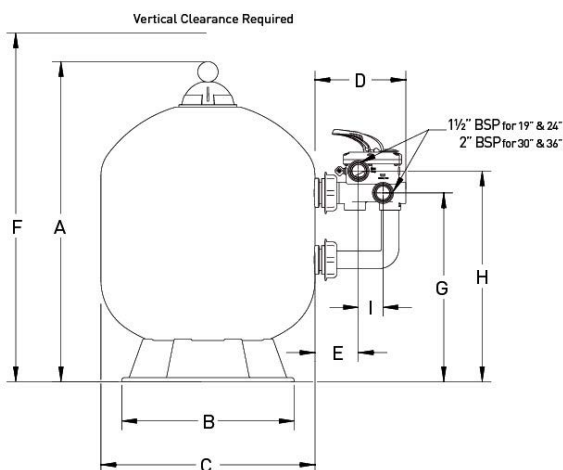

Stock Code	TRT19	TRT24	TRT30	TRT36
Model	F-1958-TRV	F-2458-TRV	F-3058-TRV	F-3658-TRV
A (mm)	825	955	1095	1200
B (mm)	400	400	610	610
C (mm)	480	610	762	914
D (mm)	252	252	302	302
E (mm)	120	120	160	160
F (mm)	876	1006	1146	1251
G (mm)	463	530	590	657
H (mm)	524	593	671	738
I (mm)	70	70	70	70
Flow Rate (m ³ /hr)	8.5	14	22	32
Filter Area (m ²)	0.17	0.29	0.45	0.64
Gravel / Sand (kg)	20 / 52	40 / 108	80 / 200	120 / 310
Connections	1.5"	1.5"	2"	2"

