

Plastica Reduction Gearbox with Steering Wheel

CONTENTS:

1 x Reduction Gearbox (with steering wheel), 2 x Screws and 1 x Drill bit



1. Undo the two slidlock end boss retaining screws.



2. Lift the end boss up out of slidlock endstand Y piece.




3. Remove the end boss unit from the reel tube, pulling firmly out.



4. Carefully insert reduction gearbox into reel tube so it is flush with the end, whilst taking note of the orientation of end boss and reel.



5. Using the existing holes in the reel tube as a guide, drill through into the reduction gearbox end boss using the supplied drill bit.

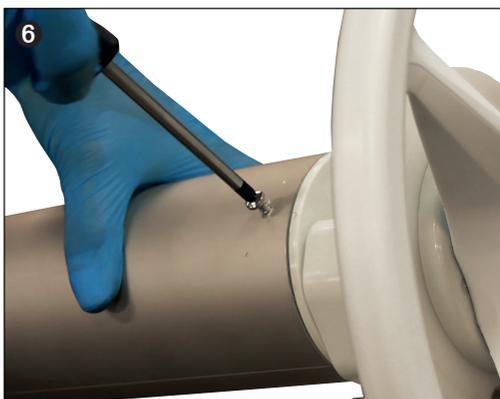

6. Secure the gearbox end boss to the reel tube through the drilled holes using the two supplied screws with a cross/ pozi head screwdriver.



7. Replace into the end stand Y Piece.

 **Plastica**

The UK's Leading Independent Swimming Pool Manufacturer and Distributor

 www.plasticapools.net

Find us on     