

HARVIA VIRTÄ

HL110400

The Harvia Virtä heater's strong structure and exceptional ease of maintenance make it excellently suitable for those who use the sauna often and like to enjoy the steam for long periods of time.

Advantages

- A reliable heater with sturdy structure for home sauna and professional use
- The large number of stones guarantees soft and abundant steam. Efficient air circulation heats the sauna very quickly
- Sleek and modern design
- The heating elements are separated from the stones, which results in a long heating element life span
- The maintenance hatch on the front enables quick and easy maintenance without touching the stones



Features

Main material : Steel


H x W x D : 810.0 x 415.0 x 410.0 mm

Net weight (kg) : 26.6


Installation location : Floor

ID	GTIN	Output (kW)	Sauna room size min - max m3
HL110400	6410082613175	11 kW	9.0-18.0


Related products



SFE-350400



SFE-500500



HL1M



HL1



HL3




Spare parts

Product	ID	Pcs
Adjustable leg	ZSA-440	
	ZCU-842	
Solide sauna S2119LD	S2119LD	
Solide sauna S2122LD	S2122LD	
Solide sauna S2125LD	S2125LD	
Heating element 3600W 230V	SPZCU-836	3
Adjusting leg M10x60 x 4 pcs, floor mounted heaters	SPZSA-442	1


Technical details

Technical data	Type / attribute	HL110400
	Color	Black
	Power output	11 kW
	Stone sizes	Ø10–15 cm
	Stone amount (kg)	70
Dimensions	Product width	415
	Product height	810
	Product depth (mm)	410
	Net weight (kg)	26.6
	Gross weight	29
	Package width	500
	Package height	870
	Package depth	505
Safety and installation dimensions	Safety distance front (non-combustible materials)	30
	Safety distance front (combustible materials)	30
	Safety distance right side (combustible materials)	30
	Safety distance left side (combustible materials)	30
	Safety distance side (non-combustible materials)	30
	safety distance to the side wall (combustible materials)	30
	Safety distance behind (non-combustible materials)	30
	Safety distance behind (combustible materials)	30
	Safety distance (Ceiling)	1100
	Room min. height(depends on connections and therefore from output, star/delta)	1900
	Installation opening height	1900
	Installation opening width	475
	Installation opening depth	400


Technical images

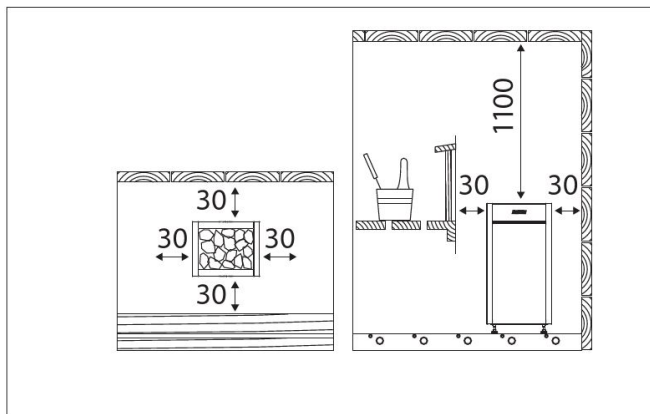


Minimum safety distances (all dimensions in millimeters)

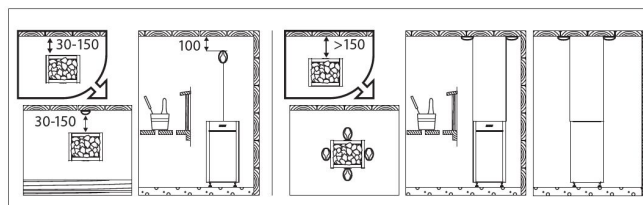

Installing the sensor (all dimensions in millimeters)

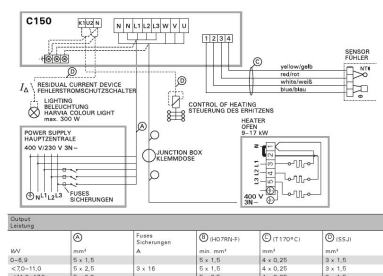

Electrical connections of control unit C150 and HL heater

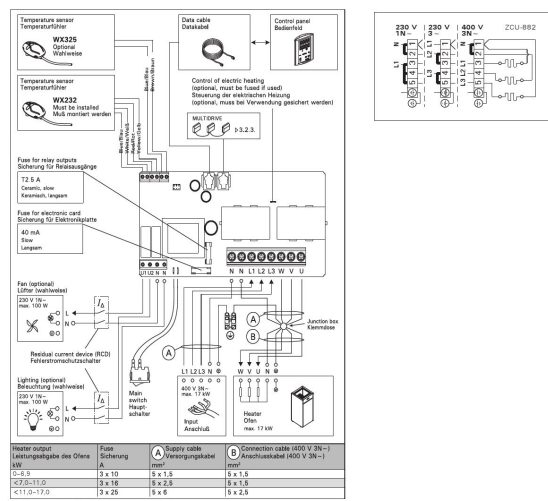

Electrical connections of control unit C150 and HL heater