



BADU EasyFit Eco VS

Universal pump with
great genes.

Broad field of application with
high flexibility.

Product information

This universal pump combines the high installation flexibility of the BADU EasyFit with the wide field of application and the energy efficiency of the BADU 90 Eco VS.

Adaptable connection sets and variable pump feet allow the pump to take over the exact position of the old pump in an existing unit.

The pump is delivered ready for connection with a 5 wire control cable and mains cable.

Field of application

Swimming pool water circulation through a filter system.

The pump can be installed maximum 3 m above or below water level.

Design

Monoblock-type pump with integrated strainer tank.

The bellow-type mechanical seal is mounted on a plastic shaft protector sleeve.

Motor/pump shaft has no contact with the pool water providing complete electrical separation.

- Strainer tank capacity: approximately 3L
- Strainer basket mesh size: approximately 3.2 x 2.6 mm

Can be controlled using the BADU Eco Logic remote control.


Materials used

- Pump casing: PP GF 30
- Intermediate housing: PP GF 30
- Gland housing: PP TV 40
- Diffuser: PA 66 GF 30/PP GF 30
- Impeller: PP GF 30
- Strainer basket: PP
- Lid: PC, transparent/PP GF 30
- Glue sockets: ABS
- Mechanical seal: carbon/ceramic/NBR
- Screws: stainless steel

Technical specifications

	EasyFit Eco VS
Inlet/outlet	63/63 mm
Power output	1.10 kW
Rated current	0.60–6.10 A
Phase	Single
Voltage	1~ 230 V
Code	14 82 240 938
Total length (L)	615 mm

Dimensions

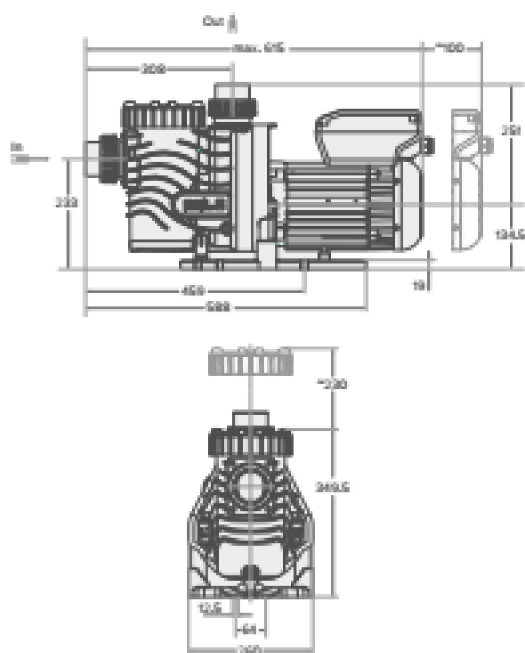

Flow curves

