


Booster Pump

BOOSTER


- **Adaptable:** union fittings provided
- **Easy to install**
- **Extremely quiet**
- **Suitable for all types of pressure cleaner**



Union fittings

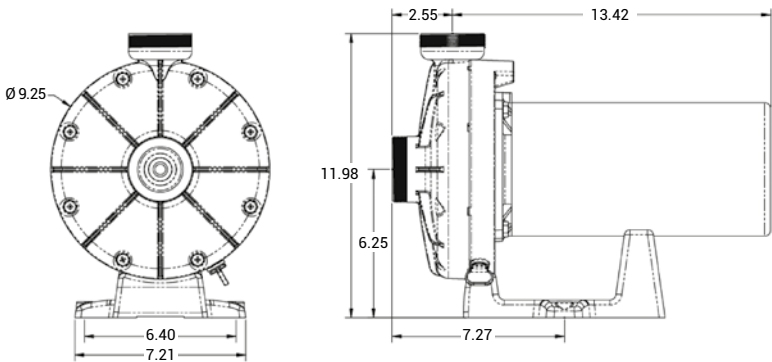

Pressure (mbar)

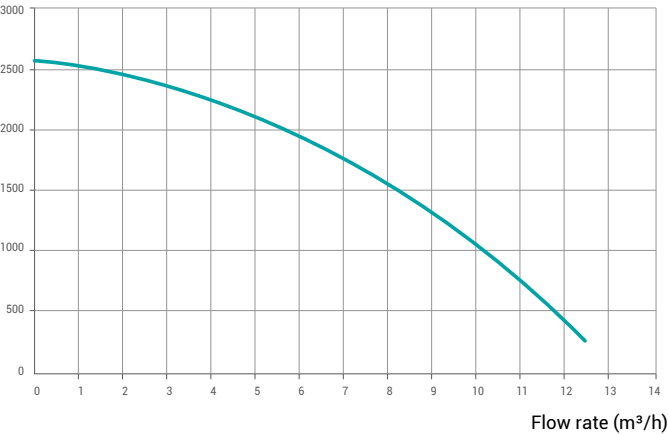

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304S, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50Hz, 2 Poles
Housing/impeller	PP+GF/Noryl® + GF

BOOSTER
PUMP

Type HP	Fitting (mm)	Weight (kg)	Total length (mm)	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor P2 (W)	Amps at P1 Max (A)	Quantity per pallet	Item
1	50	12.2	389	1190	235	5.2	32	SP6050EE2