



valve batteries

manual options

single filter face pipework

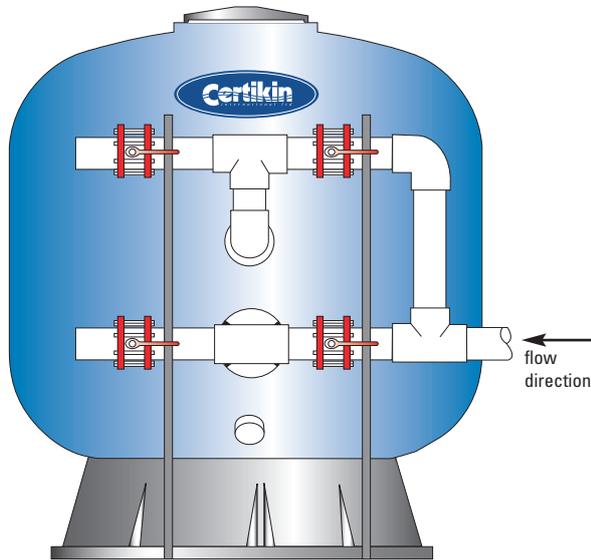

4 Valve Battery

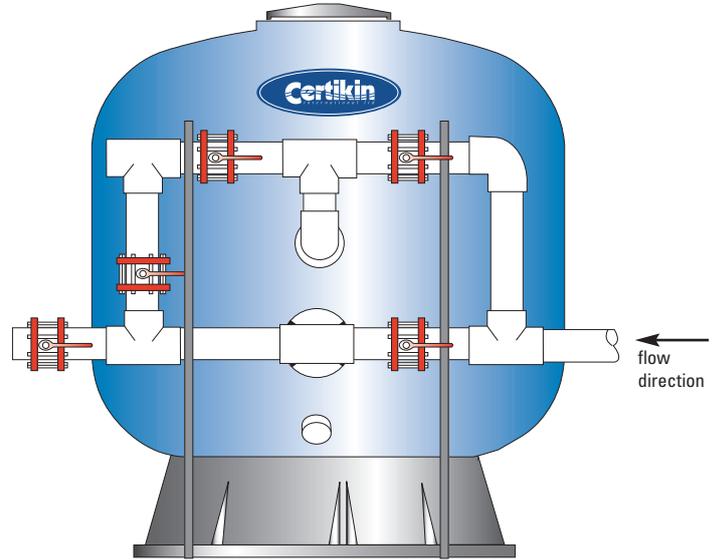

5 Valve Battery

Diagrams are for illustrative purposes only and are not to scale. They represent a typical layout and should not be used for installation.



Single Filter Face Pipework

Face pipework batteries are supplied loose for site assembly and include PVC-U fittings, Pipe, Butterfly Valves, and 2 x Supports with 4 x Pipe clips

Note:

- Pressure gauge panel supplied with filter
- Butterfly valves have EPDM seals and ratchet locking lever arms
- Pipe and fittings are PN10 rated



Single Filter 4 & 5 Valve Battery Sets

4 Valve Code	5 Valve Code	Conn mm	Filter Diameter		
			11-30 m ³ /m ² /h	30-40 m ³ /m ² /h	40-50 m ³ /m ² /h
SLX075-4	SLX075-5	75	1050	1050	-
SLX075-4	SLX075-5	75	1200	-	-
SLX090-4	SLX090-5	90	1400	1200	1050
SLX090-4	SLX090-5	90	-	-	1200
SLX110-4	SLX110-5	110	1600	1400	1400
SLX110-4	SLX110-5	110	1800	1600	-
SLX125-4	SLX125-5	125	2000	1800	1600
SLX140-4	SLX140-5	140	2350	2000	1800
SLX160-4	SLX160-5	160	2500	2350	2000
SLX200-4	SLX200-5	200	3000	2500	2350




Certikin Backwash Sightglass (EPDM seals)

Metric Code	Size (mm)	Imperial Code	Size (inch)
SPXSG075	75mm	SPXSG075	2.5"
SPXSG090	90mm	SPXSG300	3"
SPXSG110	110mm	SPXSG400	4"
SPXSG125	125mm	SPXSG140	5"
SPXSG140	140mm	SPXSG600	6"
SPXSG160	160mm		



Certikin Sight Glass

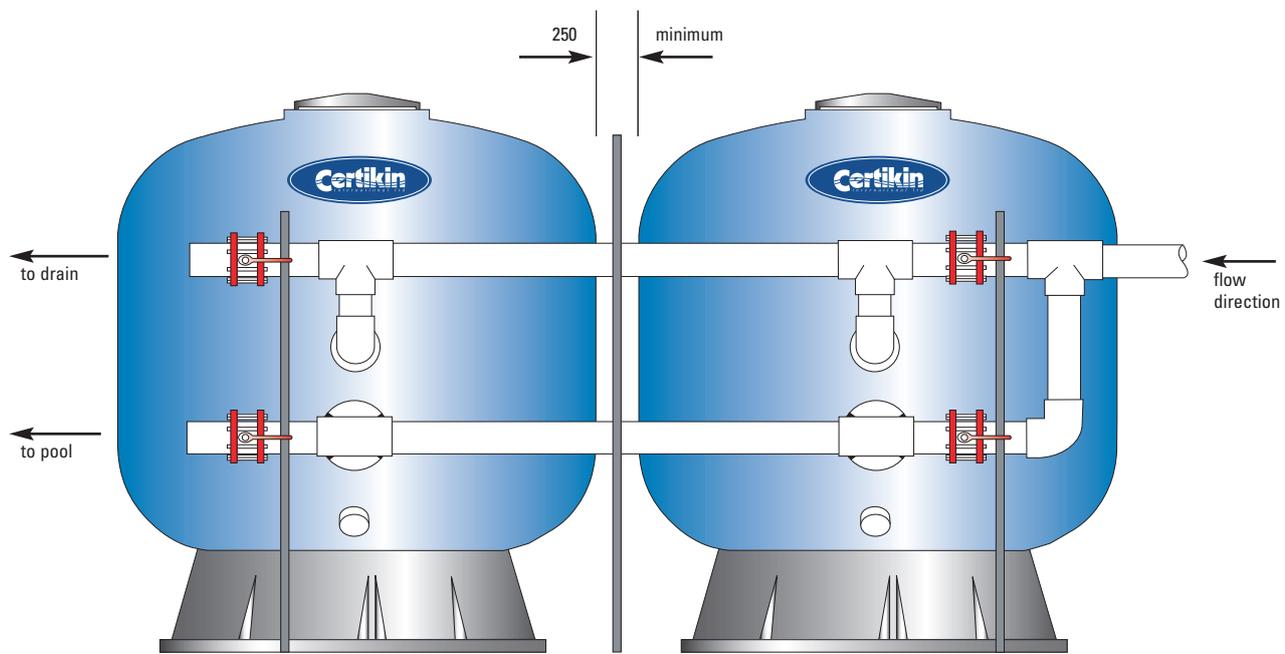

4 Valve Battery



Double Filter 4 & 5 Valve Battery Sets

4 Valve Code	5 Valve Code	Conn mm	Filter Diameter		
			11-30 m ² /m ² /h	30-40 m ² /m ² /h	40-50 m ² /m ² /h
SLX075/090-4	SLX075/090-5	75	1050	-	-
SLX075/110-4	SLX075/110-5	75	1200	1050	-
SLX090/125-4	SLX090/125-5	90	1400	1200	1050
SLX090/140-4	SLX090/140-5	90	-	-	1200
SLX110/140-4	SLX110/140-5	110	1600	1400	-
SLX110/160-4	SLX110/160-5	110	1800	1600	1400
SLX125/160-4	SLX125/160-5	125	2000	-	-
SLX125/200-4	SLX125/200-5	125	-	1800	1600
SLX140/200-4	SLX140/200-5	140	-	2000	1800
SLX140/225-4	SLX140/225-5	140	2350	-	-
SLX160/225-4	SLX160/225-5	160	2500	-	2000
SLX160/250-4	SLX160/250-5	160	-	2350	-
SLX200/250-4	SLX200/250-5	200	3000	2500	-




Double Filter Face Pipework

Double filter face pipework is sized to accommodate the increased flow through two filters.

Face pipework batteries are supplied loose for site assembly and include PVC-U fittings, Pipe, Butterfly valves and pipe supports.

Pneumatic valve options are available.

- Note:
- Pressure gauge panel supplied with filter
 - Butterfly valves have EPDM seals and ratchet locking lever arms
 - Pipe & fittings are PN10 rated

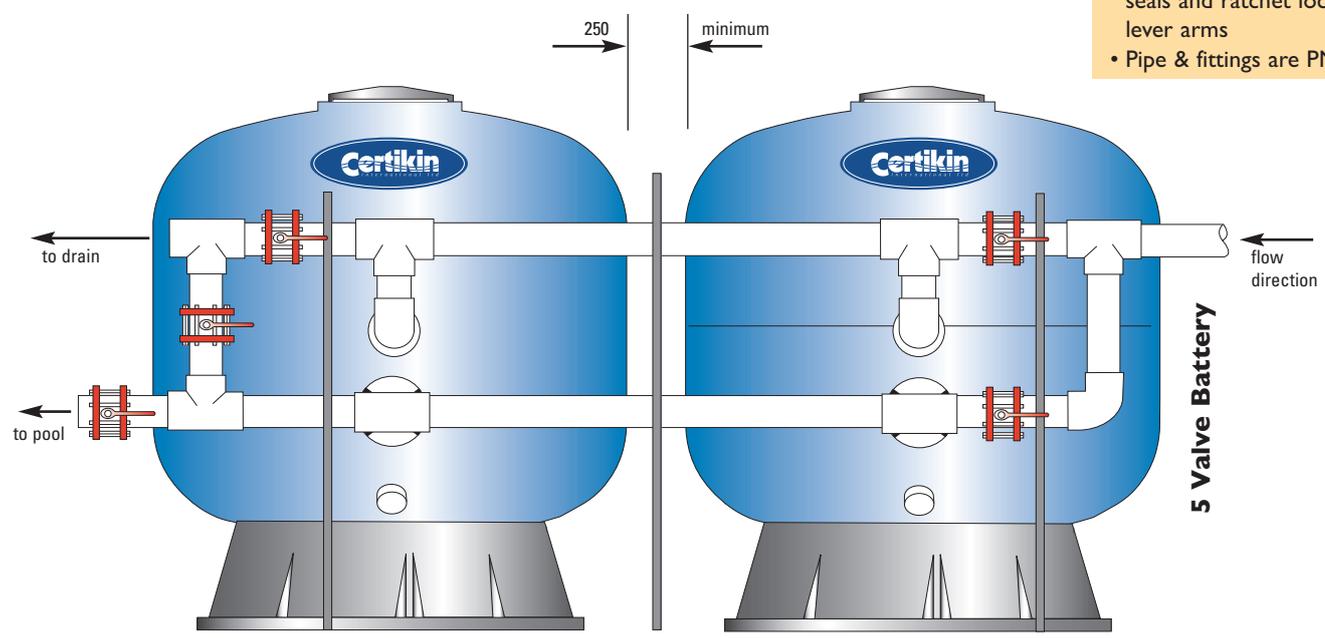

5 Valve Battery

Diagrams are for illustrative purposes only and are not to scale. They represent a typical layout and should not be used for installation.

valve batteries


automatic options - pneumatic, motorized butterfly valves & accessories




Pneumatic valve



Automatic valve battery sets are available in five valve pneumatic or motorized versions, supplied pre-assembled with steel supports and a pressure gauge panel.



Motorized valve



BSCP



BSPS



BSAL

Pneumatic Butterfly Valves

Code	Description
BS075-P	75mm single battery set with 5 pneumatic valves
BS090-P	90mm single battery set with 5 pneumatic valves
BS110-P	110mm single battery set with 5 pneumatic valves
BS125-P	125mm single battery set with 5 pneumatic valves
BS140-P	140mm single battery set with 5 pneumatic valves
BS160-P	160mm single battery set with 5 pneumatic valves
BS200-P	200mm single battery set with 5 pneumatic valves
BS225-P	225mm single battery set with 5 pneumatic valves

Motorized Butterfly Valves

Code	Description
BS075-M	75mm single battery set with 5 motorized valves
BS090-M	90mm single battery set with 5 motorized valves
BS110-M	110mm single battery set with 5 motorized valves
BS125-M	125mm single battery set with 5 motorized valves
BS140-M	140mm single battery set with 5 motorized valves
BS160-M	160mm single battery set with 5 motorized valves
BS200-M	200mm single battery set with 5 motorized valves
BS225-M	225mm single battery set with 5 motorized valves

Accessories

Code	Description
BSCP	Control panel for automatic valve set motorized or pneumatic (one panel per battery set required)
BSPS	Pressure stat overrides timed backwashing should there be a pressure build up (to be used in conjunction with control panel)
BSAL	Pressure alarm indicates that a backwash has been activated due to pressure

heavyduty edition 3